



PT55N

The PT Model range
includes capacities up to
5500lbs.



The PT55N is designed to be used for multi-shift operations with the utmost efficiency. New design is more powerful with increased speed when compared to a standard walkie/riders. Optional: Lithium Iron Phosphate

NOBLELIFT NORTH AMERICA

Add: 2461 S Wolf Road, Des Plaines, IL 60018

Tel: 847-595-7100

Fax: 847-595-7200

Email: sales@nobleliftna.com

Http: www.nobleliftna.com

NOBLELIFT

Material Handling

We promise, We deliver

PT55N

Electric pallet truck



Capacity
5500lbs



Easy
Maintenance



High
Performance



Powerful
Battery



Robust
Design

NEW / *Noblelift Products* ARRIVAL





NOBLELIFT INTELLIGENT EQUIPMENT CO., LTD

MaterialHandling.com

1415 Davis Rd Elgin, IL 60123

Phone (855) 719-1415

sales@materialhandling.com

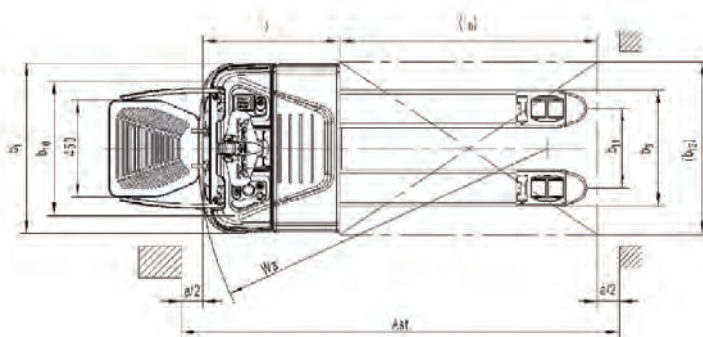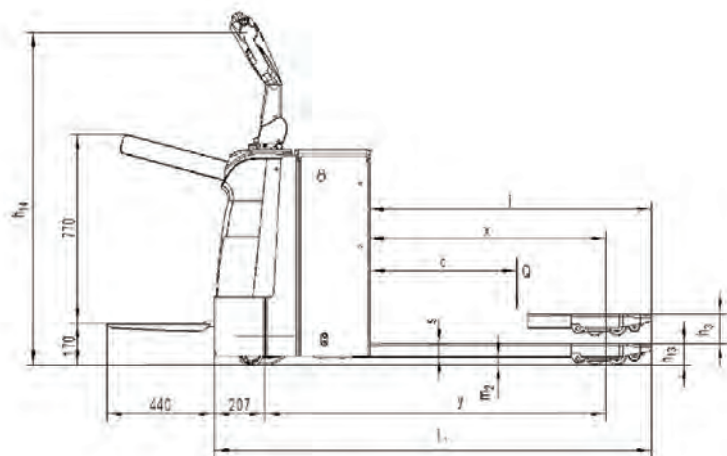

Distinguishing mark			
1.2	Manufacturer's type designation		PT55N
1.3	Drive		Battery
1.4	Operator type		Walkie/Rider
1.5	Load capacity/Rated load	Q (t)	2,5
1.6	Load centre distance	c (in)	23,62
1.8	Load distance,centre of drive axle to fork	x (in)	35
1.9	Wheelbase	y (in)	56
Weight			
2.1	Service weight	lbs	1697
2.2	Axle loading, laden front/rear	lbs	3020 / 4387
2.3	Axle loading, unladen front/rear	lbs	1344 / 352.7
Tires, chassis			
3.1	Tires		Polyurethane(PU)
3.2	Tire size,front	Øxw (in)	Ø 9x2.75
3.3	Tire size,rear	Øxw (in)	Ø 3.3x3.3
3.4	Additional wheels(dimensions)	Øxw (in)	Ø 3.9x1.5
3.5	Wheels,number front/rear(x=driven wheels)		1x+2/4
3.6	Tread,front	b ₁₀ (in)	21
3.7	Tread,rear	b ₁₁ (in)	14.4/20
Dimensions			
4.4	Lift	h ₃ (in)	4.7
4.9	Height of tiller in drive position min./max.	h ₁₄ (in)	37 / 53
4.15	Height, lowered	h ₁₃ (in)	3.3
4.19	Overall length	l ₁ (in)	74
4.20	Length to face of forks	l ₂ (in)	29
4.21	Overall width	b ₁ (in)	31
4.22	Fork dimensions	s/e/l (in)	2 / 6.8 / 45
4.25	Width across forks	b ₅ (in)	21 / 27
4.32	Ground clearance, centre of wheelbase	m ₂ (in)	1.8
4.33	Aisle width for pallets 1000X1200 crossways	Ast (in)	98
4.34	Aisle width for pallets 800X1200 lengthways	Ast (in)	94
4.35	Turning radius	Wa (in)	66.5
Performance data			
5.1	Travel speed,laden unladen	mph	3.7 / 4.3
5.2	Lift speed,laden/unladen	m/s	0.035 / 0.045
5.3	Lowering speed,laden/unladen	m/s	0.045 / 0.050
5.8	Max. gradeability, laden/unladen	%	8 / 15
5.10	Service brake		Eletromagnetic
Electric-engine			
6.1	Drive motor rating S2 60min	kW	1.4
6.2	Lift motor rating at S3 10%	kW	2.2
6.3	Battery acc. to DIN 43531/35/36A,B,C,norm		/
6.4	Battery voltage,nominal capacity K5	V / Ah	24 / 270-350
6.5	Battery Weight(+/-5%)	lbs	518-628
6.6	Energy consumption acc. to VDI cycle	kWh/h	0.90
Additional data			
8.1	Type of drive control		AC speed Control
8.4	Sound level at driver's ear acc. to EN 12053	dB(A)	69

1) Load section lowered: +2.55in; 2) With side battery removal: +1.18in; 3) With unfolded platform: +17in.