

# NOBLELIFT

**Manual &  
Semi-Electric  
Stacker  
Adjustable Base Legs  
2200 LBS**

**SPN22AG**

Lift Height >  
Single mast: 63"  
Duplex mast: 98"/118"

**SFH22AG**

< Lift Height  
Single mast: 63"  
Duplex mast: 98"/118"/137"





# SFH22AG

1KG=2.2LB 1INCH=25.4MM

## Manual Hydraulic Stackers – Adjustable Base Legs

| Model                |      | SFH22-63          | SFH22-98          | SFH22-118         |
|----------------------|------|-------------------|-------------------|-------------------|
| Capacity             | lbs  | 2200              | 2200              | 2200              |
| Lifting Height Max.  | inch | 63                | 98                | 118               |
| Lifting Height Min.  | inch | 23/4              | 23/4              | 23/4              |
| Fork Length          | inch | 36                | 36                | 36                |
| Fork Width           | inch | 4                 | 4                 | 4                 |
| Outer width of forks | inch | 8.5-33.5          | 8.5-33.5          | 8.5-33.5          |
| Base legs I.D.       | inch | 36 to 48          | 36 to 48          | 36 to 48          |
| Base legs O.D.       | inch | 43 to 54          | 43 to 54          | 43 to 54          |
| Overall Length       | inch | 56                | 56                | 56                |
| Overall Width        | inch | 43 to 54          | 43 to 54          | 43 to 54          |
| Overall Height       | inch | 79 1/2            | 69 3/4            | 79 1/2            |
| Load Center          | inch | 20                | 20                | 20                |
| Front Caster Dia.    | inch | 4                 | 4                 | 4                 |
| Rear Caster Dia.     | inch | 7                 | 7                 | 7                 |
| Front Wheel Dia.     | inch | 5                 | 5                 | 5                 |
| Rear Wheel Dia.      | inch | 7                 | 7                 | 7                 |
| Wheel Type           | inch | 2 Rigid, 2 Swivel | 2 Rigid, 2 Swivel | 2 Rigid, 2 Swivel |
| Shipping Weight      | lbs  | 705               | 795               | 850               |

# SFH22AG

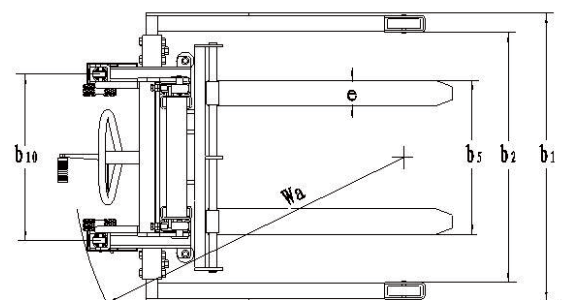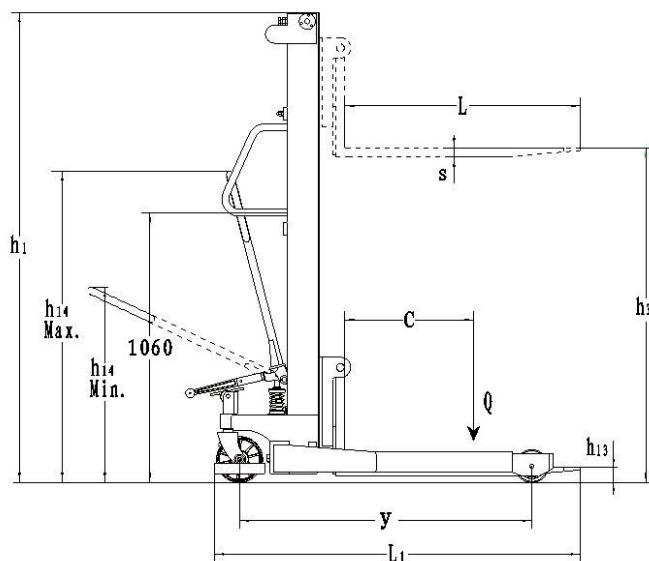


# SPN22AG

1KG=2.2LB 1INCH=25.4MM

## Manual Hydraulic Stackers – Adjustable Base Legs

| Model               |      | SPN22-63         | SPN22-98         | SPN22-118        | SPN22-138        |
|---------------------|------|------------------|------------------|------------------|------------------|
| Capacity            | lbs  | 2200             | 2200             | 2200             | 2200             |
| Lifting Height Max. | inch | 63               | 98               | 118              | 138              |
| Lifting Height Min. | inch | 21/8             | 21/8             | 21/8             | 21/8             |
| Fork Length         | inch | 42               | 42               | 42               | 42               |
| Fork Width          | inch | 4                | 4                | 4                | 4                |
| Base legs I.D.      | inch | 38 to 50         | 38 to 50         | 38 to 50         | 38 to 50         |
| Base legs O.D.      | inch | 46 to 58         | 46 to 58         | 46 to 58         | 46 to 58         |
| Overall Length      | inch | 661/2            | 661/2            | 661/2            | 661/2            |
| Overall Width       | inch | 46 to 58         | 46 to 58         | 46 to 58         | 46 to 58         |
| Overall Height      | inch | 80               | 72               | 82               | 891/2            |
| Load Center         | inch | 24               | 24               | 24               | 24               |
| Voltage             | V    | 12               | 12               | 12               | 12               |
| Rear Caster Dia.    | inch | 7                | 7                | 7                | 7                |
| Front Wheel Dia.    | inch | 5                | 5                | 5                | 5                |
| Rear Wheel Dia.     | inch | 7                | 7                | 7                | 7                |
| Wheel Type          | inch | 2 Rigid,2 Swivel | 2 Rigid,2 Swivel | 2 Rigid,2 Swivel | 2 Rigid,2 Swivel |

# SPN22AG

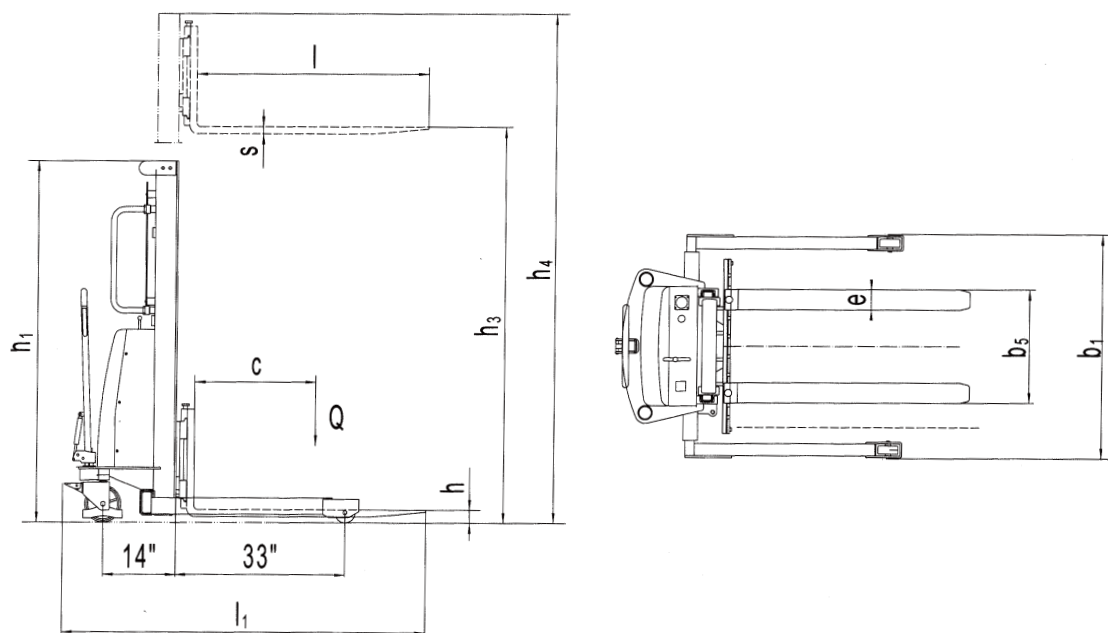

# SPN22AG/SFH22AG

## Manual & Semi-Electric Stacker

### **SFH22AG** Manual Hydraulic Stackers – Adjustable Base Legs

- For lifting loads, skids, racks, and objects. Forks adjust from side to side to accommodate skid widths.
- Feature fold-away hydraulic foot pump for raising loads.
- Two-swivel and two rigid casters provide four wheel support for heavy loads.
- Include wheel lock and safety screen to ensure safety during operation.

### **SPN22AG** Semi-electric Stacker – Adjustable Base Legs

- Adjustable base legs for lifting loads, skids, racks, and objects.
- Forks adjust from side to side to accommodate skid widths.
- Adjustable forks lowers to the minimum height 2 1/8".
- Study and reliable mast made of rolled U-profiles. Hard chrome plated piston. Adjustable lifting chain. Powerful lift motor 2.1 HP.
- Integrated 150 AH maintenance free battery supplies strong power to effect frequent lifting tasks, an integrated charger facilitates easy and reliable charging of the integrated battery.

AUTHORIZED DEALER

#### **Noblelift North America Corp.**

Add: 2451 American Lane,  
Elk Grove Village, IL 60007  
TEL: +1-847-595-7100  
FAX: +1-847-595-7200  
WEB: [www.noblelift.us](http://www.noblelift.us)  
Email: [sales@noblelift.com](mailto:sales@noblelift.com)