


NARROW SCISSOR LIFT - EHLT-N-1648-1-32

APPROX WEIGHT: 224.97 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

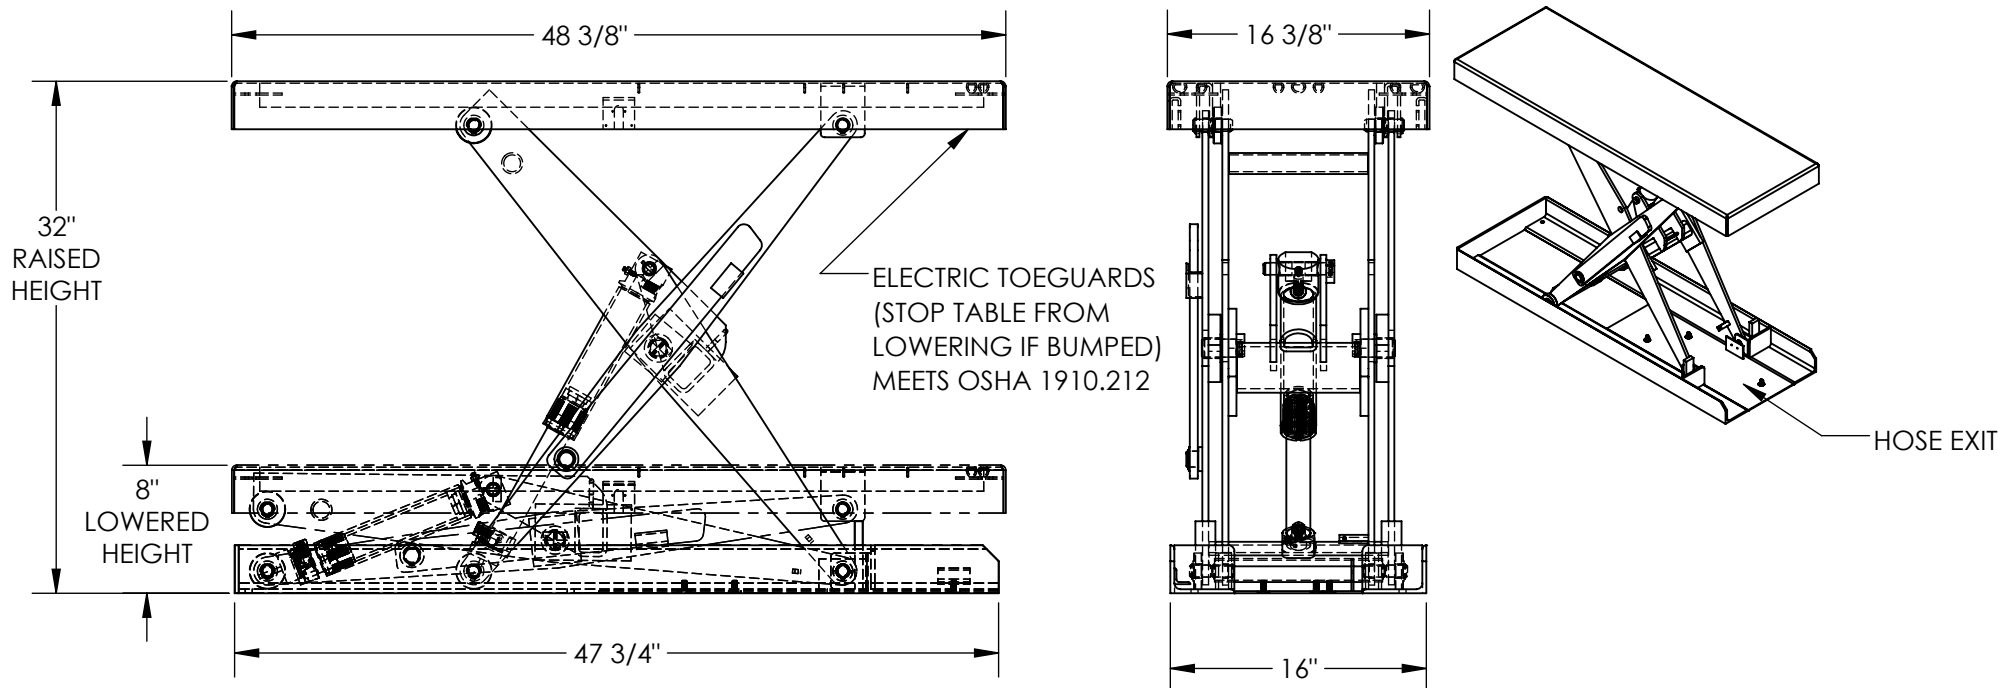

DECK TOLERANCES $\pm 1/2"$
TABLE HEIGHT TOLERANCES $\pm 1/2"$
DECK FLATNESS $\pm 1/4"$

DIMENSION TOLERANCE $\pm 1/4"$

STANDARD FEATURES

MODEL NUMBER IS EHLT-N-1648-1-32
PLATFORM WIDTH IS 16 3/8"
PLATFORM LENGTH IS 48 3/8"
OVERALL WIDTH IS 16 3/8"
OVERALL LENGTH IS 48 3/8"
RAISED HEIGHT IS 32"
LOWERED HEIGHT IS 8"
CAPACITY (EVENLY DISTRIBUTED) IS 1,000 LBS
24V AC CONTROL VOLTAGE
SAFETY MAINTENANCE PROPS
DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN
OTHER VOLTAGES HAVE A 2' TEST LEAD
INTERNAL POWER UNIT
EMERGENCY SAFETY STOP HYDRAULIC FUSES
UPPER TRAVEL LIMIT SWITCH
ELECTRIC PINCH POINT GUARD
DURABLE LIQUID PAINTED BLUE FINISH
HANDHELD PUSH BUTTON CONTROL,
W/8ft EXTENDED COIL CORD
AC 460 V, 3-PHASE, 60 HZ.

SPECIAL FEATURES

NONE

**460V 3 PHASE
AC POWER**

CONTACT FACTORY FOR
OTHER POWER OPTIONS

A P P R O V A L	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE [] As drawn [] As marked		
	Signed: _____ Date: _____		
	Printed Name: _____		
	LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		
	DISTRIBUTOR'S NAME: _____		
DRAWN BY: KEC		DATE: 7/5/16	P.O.# X
REFERENCE: X		SCALE: 1:12	W.O.# X
QUOTED LEAD TIME: X		QUOTE # X	SALES: X
			FILE NAME: 24-007-551

VESTIL MANUFACTURING