
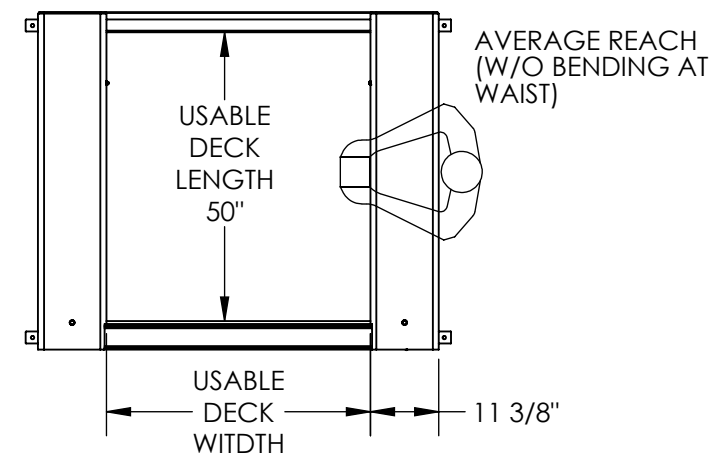
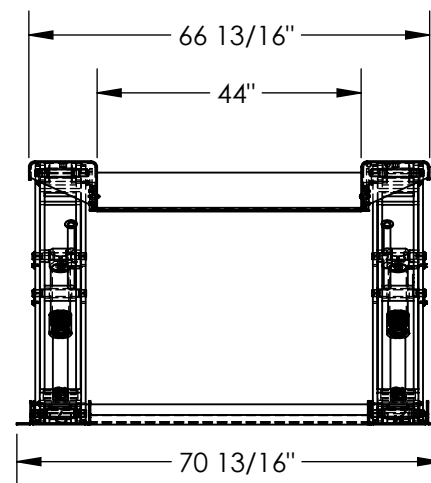


GROUND LIFT SCISSOR TABLE - EHLTG-4450-2-36-PSS

APPROX WEIGHT: 1329.95 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!


*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

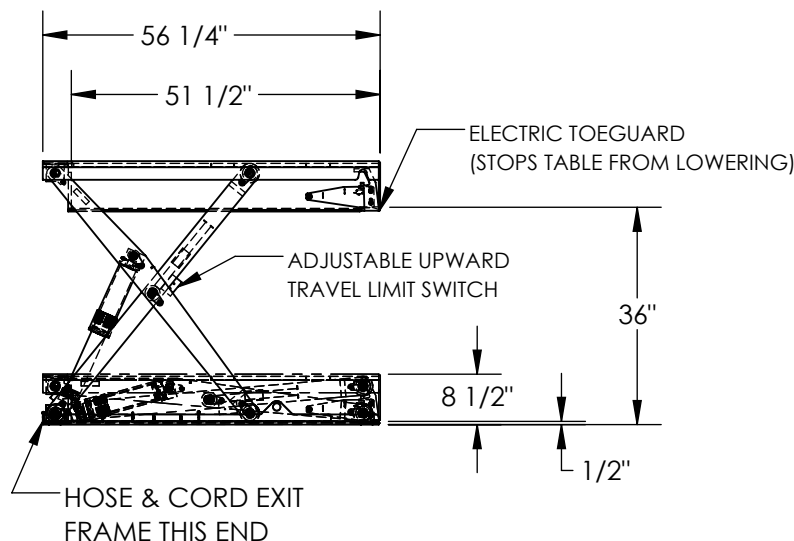


DECK TOLERANCE $\pm 1/2"$
TABLE HEIGHT TOLERANCE $\pm 1/2"$
DECK FLATNESS $\pm 1/4"$

6" HIGH
BACK PLATE

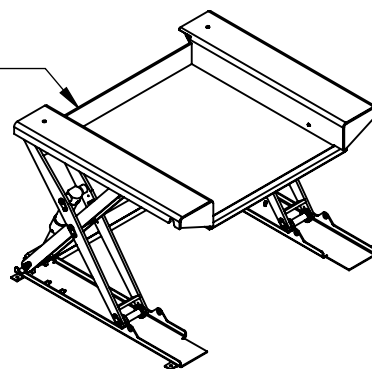

REMOTE POWER UNIT:
32 1/2" x 12" x 12 1/2" (L x W x H)
WITH 8' HOSE & CABLE



DIMENSION TOLERANCE $\pm 1/4"$

STANDARD FEATURES

MODEL NUMBER IS EHLTG-4450-2-36-PSS
USABLE WIDTH IS 44"
USABLE LENGTH IS 50"
OVERALL WIDTH IS 70 13/16"
OVERALL LENGTH IS 56 1/4"
RAISED HEIGHT IS 36"
LOWERED HEIGHT IS 1/2"
TABLE CAPACITY
(EVENLY DISTRIBUTED) IS 2000 LBS.
EXTERNAL POWER UNIT
SAFETY MAINTENANCE PROPS
DISPLACEMENT STYLE CYLINDERS
INSTALLED ROD DOWN
EMERGENCY SAFETY STOP HYDRAULIC
FUSES IN ALL CYLINDERS
UNITS HAVE 2' TEST LEAD AND PIG TAIL
FOOT CONTROL WITH 8 FT. STRAIGHT CORD
STAINLESS STEEL DECK AND FRAME
SCISSOR LEGS ARE HOT DIP GALVANIZED

460V 3 PHASE AC POWER

CONTACT FACTORY FOR
OTHER POWER OPTIONS

SPECIAL FEATURES

NONE

A
P
P
R
O
V
A
L

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

DRAWN BY: RLH

DATE: 8/3/18

REFERENCE: X

SCALE: 1:32

QUOTED LEAD TIME: X

QUOTE # X

P.O.# X

W.O.# X

SALES: X

FILE NAME:

04-007-058