
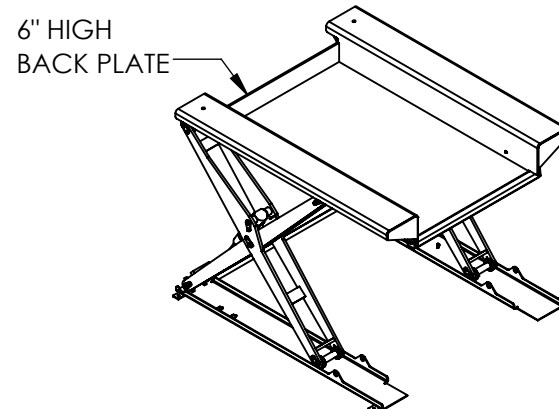
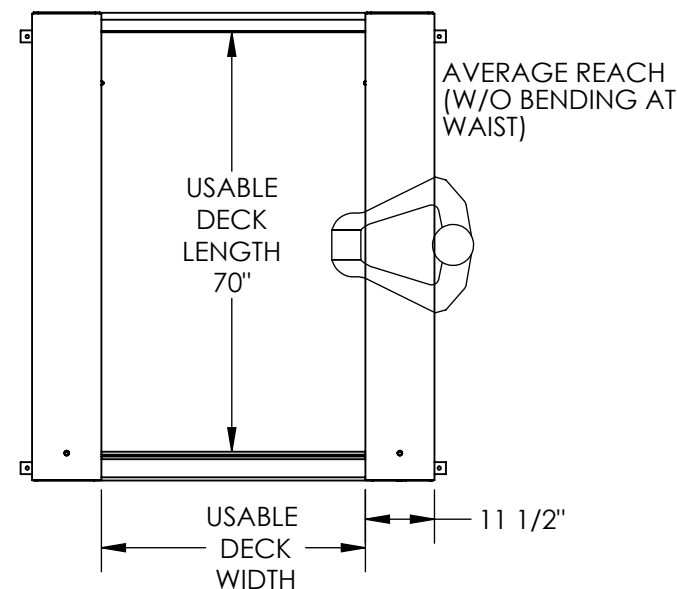
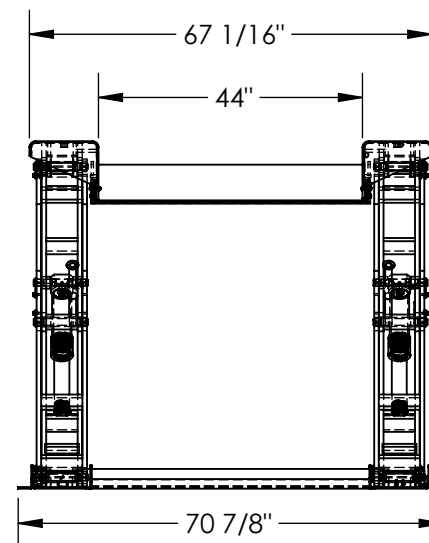


GROUND LIFT SCISSOR TABLE - EHLTG-4470-2-48-PSS


APPROX WEIGHT: 1951.32 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

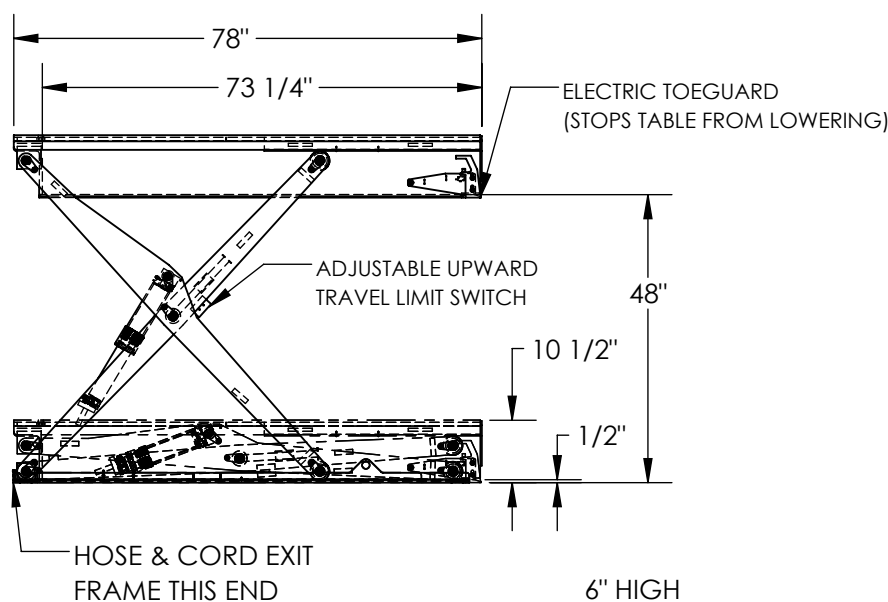

REMOTE POWER UNIT:
32 1/2" x 12" x 12 1/2" (L x W x H)
WITH 8' HOSE & CABLE



DIMENSION TOLERANCE $\pm 1/4"$

STANDARD FEATURES

MODEL NUMBER IS EHLTG-4470-2-48-PSS

USABLE WIDTH IS 44"

USABLE LENGTH 70"

OVERALL WIDTH IS 70 7/8"

OVERALL LENGTH IS 78"

RAISED HEIGHT IS 48"

LOWERED HEIGHT IS 1/2"

TABLE CAPACITY

(EVENLY DISTRIBUTED) IS 2000 LBS.

EXTERNAL POWER UNIT

SAFETY MAINTENANCE PROPS

DISPLACEMENT STYLE CLINDERS

INSTALLED ROD DOWN

EMERGENCY SAFETY STOP HYDRAULIC

FUSES IN ALL CYLINDERS

UNITS HAVE 2' TEST LEAD AND PIG TAIL

FOOT CONTROL WITH 8 FT. STRAIGHT CORD

STAINLESS STEEL DECK AND FRAME

SCISSOR LEGS ARE HOT DIP GALVANIZED

460V 3 PHASE AC POWER

CONTACT FACTORY FOR
OTHER POWER OPTIONS

SPECIAL FEATURES

NONE

DECK TOLERANCE $\pm 1/2"$
TABLE HEIGHT TOLERANCE $\pm 1/2"$
DECK FLATNESS $\pm 1/4"$

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE
[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: RLH		W.O.#
DATE: 8/16/18		X
REFERENCE: X	SCALE: 1:32	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME:
		04-007-062