
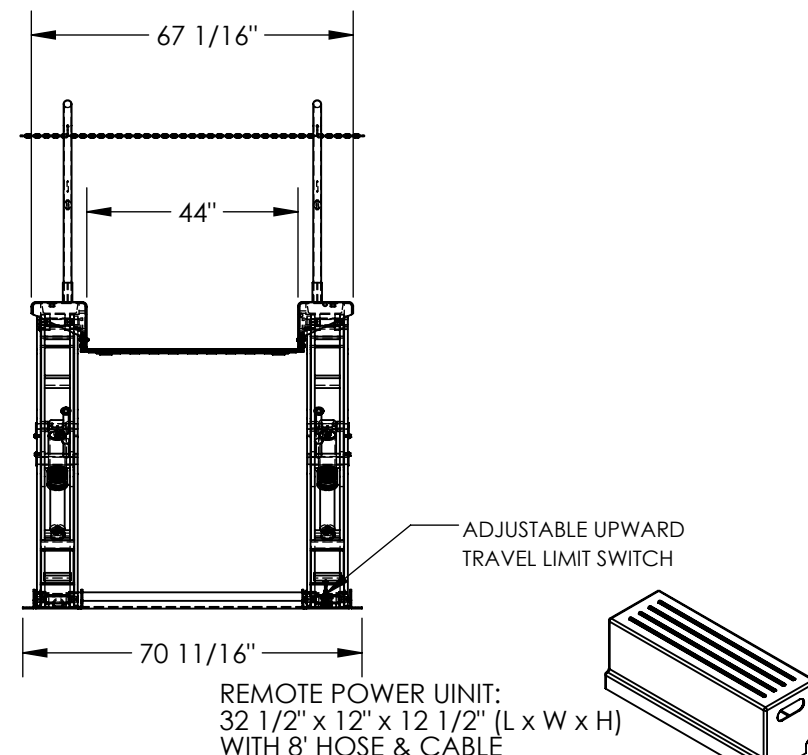


GROUND LIFT SCISSOR TABLE - EHLTG-4484-3-54

APPROX WEIGHT: 2517.66 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

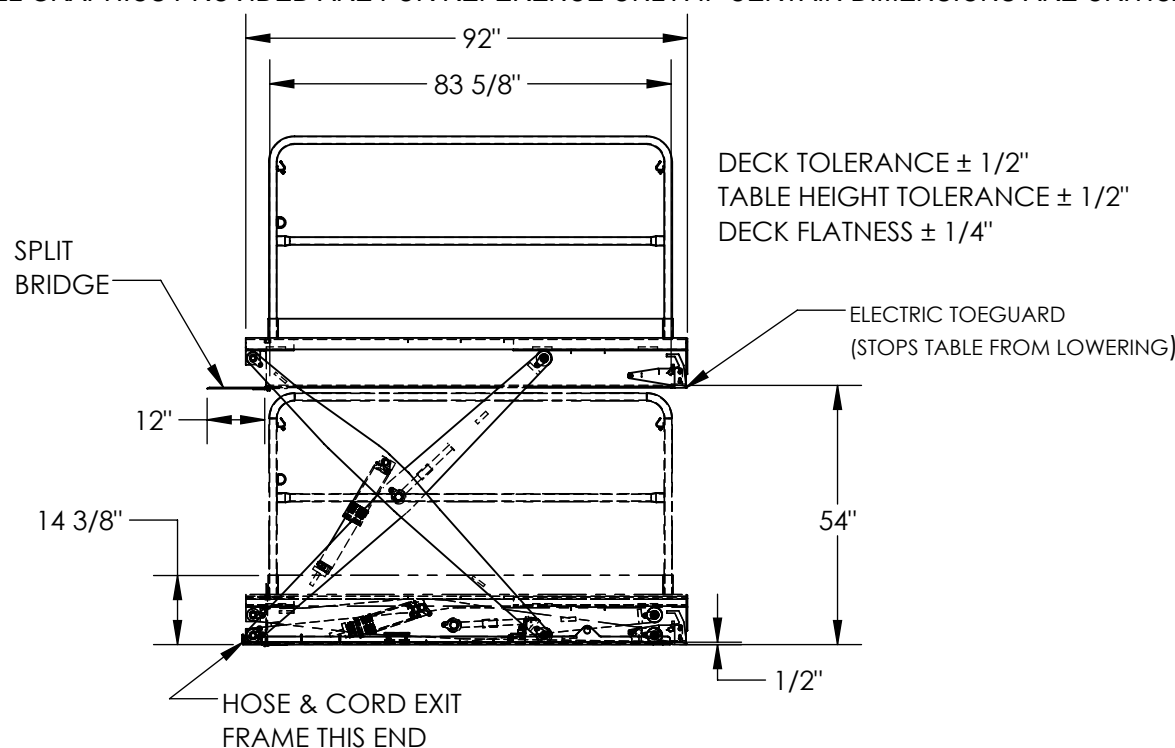

DIMENSION TOLERANCE $\pm 1/4"$

STANDARD FEATURES

MODEL NUMBER IS EHLTG-4484-3-54

OVERALL WIDTH IS 70 11/16"

USABLE WIDTH IS 44"

OVERALL LENGTH IS 92"

USABLE LENGTH IS 83 5/8"

RAISED HEIGHT IS 54"

LOWERED HEIGHT IS 12"

12" WIDE BY 44" LONG SLIT BRIDGE

TABLE CAPACITY

(EVENLY DISTRIBUTED) IS 3,000 LBS.

EXTERNAL POWER UNIT

NON-REMOVABLE TOE BOARDS

SAFETY MAINTENANCE PROPS

DISPLACEMENT STYLE CYLINDERS

INSTALLED ROD DOWN

EMERGENCY SAFETY STOP HYDRAULIC

FUSES IN ALL CYLINDERS

UNITS HAVE 2' TEST LEAD AND PIG TAIL

FOOT CONTROL WITH 8 FT. STRAIGHT CORD

DURABLE LIQUID PAINT BLUE FINISH WITH

DURABLE BAKED IN POWDER COATED

YELLOW FINISH REMOVABLE HAND RAILS

460V 3 PHASE AC POWER

CONTACT FACTORY FOR
OTHER POWER OPTIONS

SPECIAL FEATURES NONE

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

DRAWN BY:

JWW

DATE:

8/15/19

REFERENCE:

X

SCALE: 1:40

QUOTED LEAD TIME:

X

QUOTE #

X

P.O.#

X

W.O.#

X

SALES:

X

FILE NAME:

04-007-113