


LIFT MASTER BOOM, ORBIT TELESCOPING BOOM-LM-OBT-6-24

APPROX WEIGHT: 497.23 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

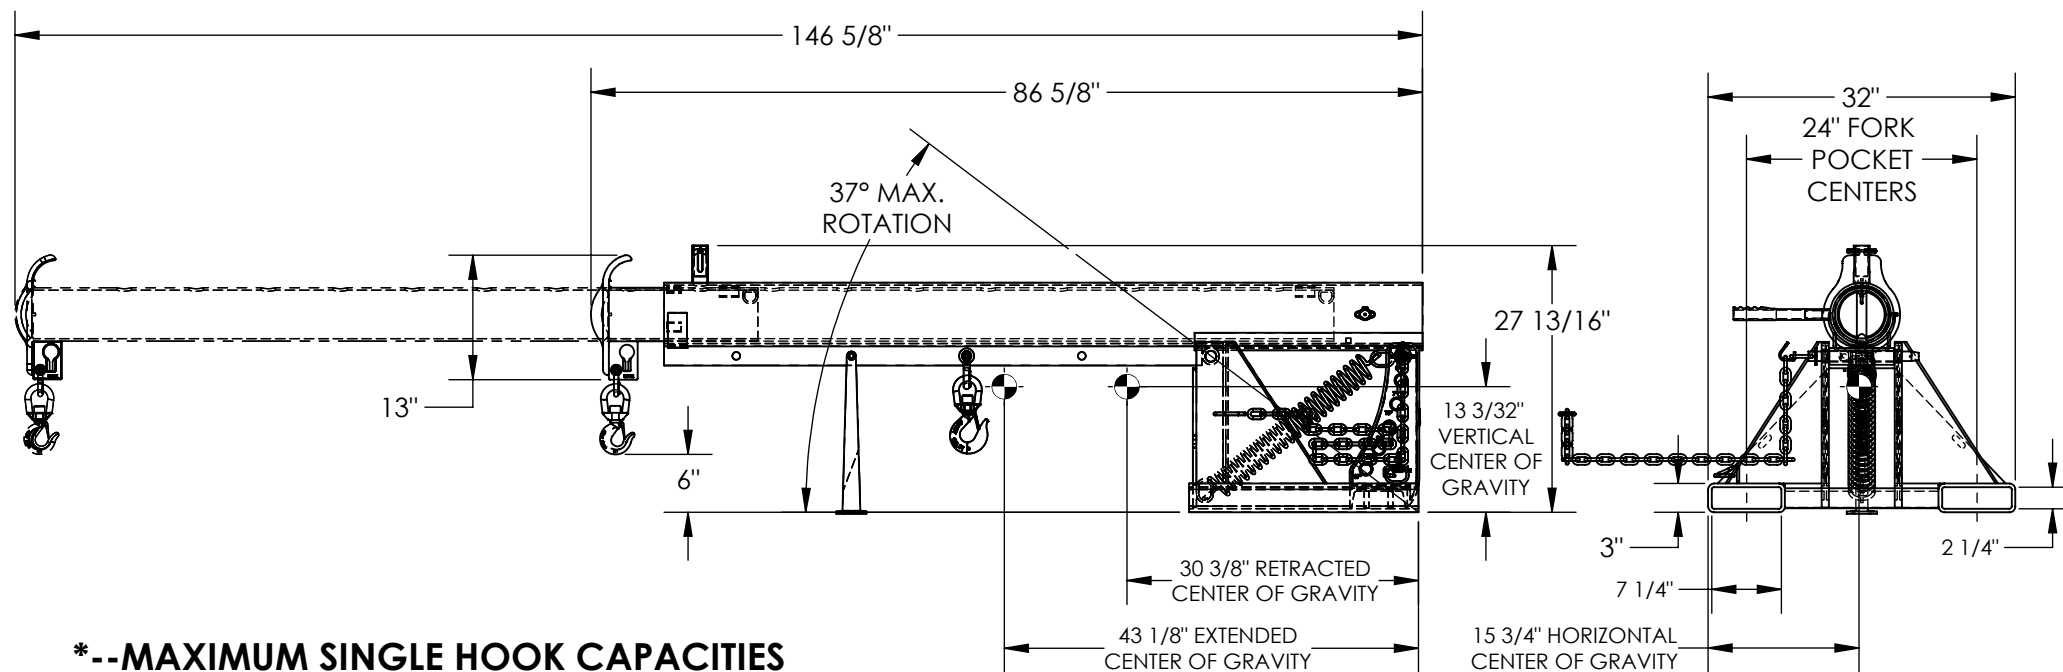

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	144"
CAPACITY	6000	5000	4500	4000	3500	3000	2600	2300	2000	1800

STANDARD FEATURES

MODEL NUMBER IS LM-OBT-6-24
CAPACITY IS 6,000 LBS
MAXIMUM TILT ANGLE IS 37°
OVERALL HEIGHT - 27 13/16"
HEIGHT (MAX TILTED) - 99 1/2"
LENGTH RETRACTED - 86 5/8"
LENGTH EXTENDED - 146 5/8"
OVERALL WIDTH IS 32"
36" MINIMUM HOOK POINT
144" MAXIMUM HOOK POINT
HOOK HEIGHT - 6"
HOOK HEIGHT (MAX TILTED) - 78 5/16"
USABLE FORK POCKET - 2 1/4"x7 1/4"
24" FORK POCKET CENTERS

FRAME DURABLE BAKED IN POWDER COATED BLUE FINISH
BOOM DURABLE BAKED IN POWDER COATED YELLOW FINISH

APPROX. WEIGHT / LOST LOAD = 497.23
MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"
NEVER EXCEED LOAD CENTER
RATING PER FORKTRUCK
MANUFACTURERS GUIDELINES.
DO NOT USE THIS FORK TRUCK
ATTACHMENT IF LOAD WILL
EXCEED FORK TRUCK MANUFACTURER'S
LOAD CENTER RATING

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE $\pm 1/4"$

A P P R O V A L	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.	
	UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE	
	[] As drawn [] As marked	
	Signed: _____ Date: _____	
	Printed Name: _____	
	LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING	

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: B.NOTHNAGEL		W.O.#
DATE: 7/1/2015		X
REFERENCE: X	SCALE: 1:20	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME:
		08-007-138