


APPROX WEIGHT: 176.36 lbs.
■ DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

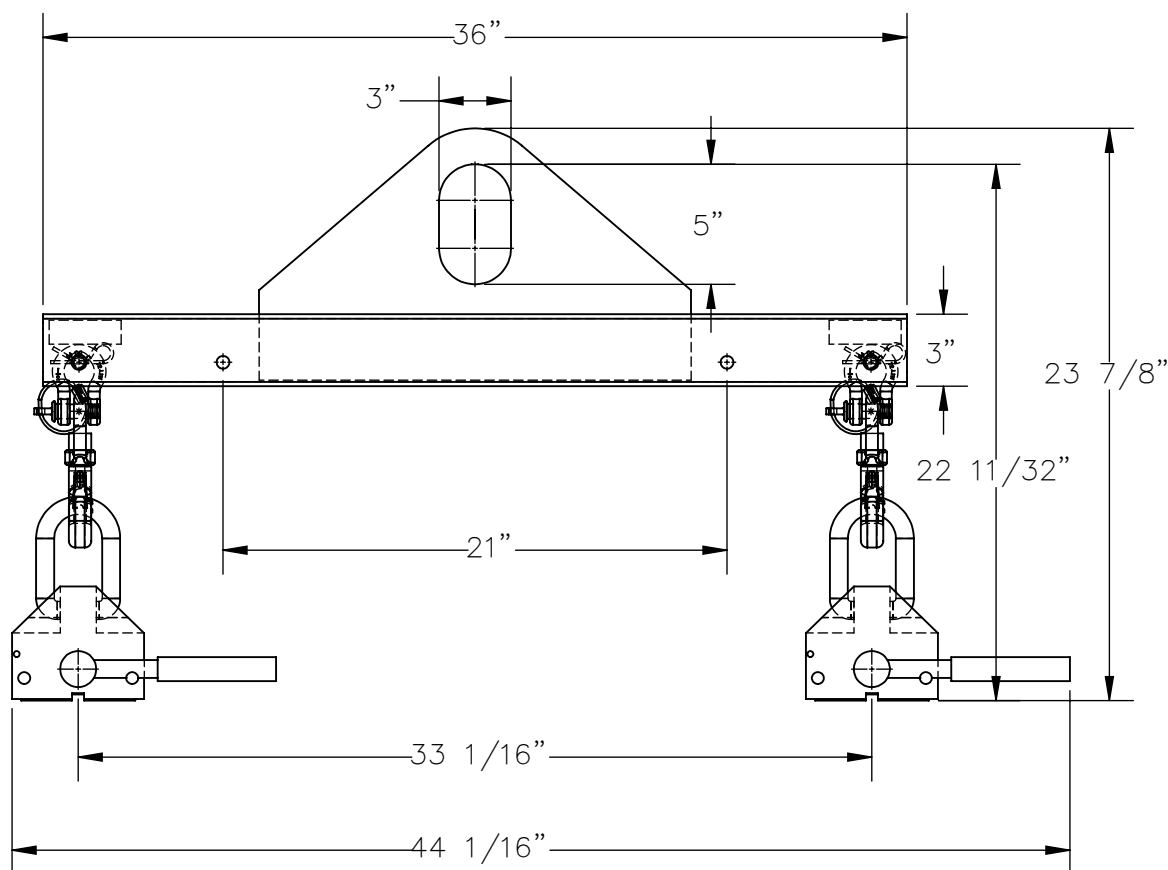

STANDARD FEATURES

MODEL NUMBER IS SBM-20-3-ML

OVERALL WIDTH IS 10 3/4"

OVERALL HEIGHT IS 23 7/8"

OVERALL LENGTH IS 44 1/16"

USABLE BAIL IS 3"x5"

MINIMUM SPREAD IS 21"

MAXIMUM SPREAD IS 33 1/16"

HEADROOM IS 22' 11 1/32"

MAX UNIFORM FLAT CAPACITY IS 2000 LBS.


MAX UNIFORM ROUND CAPACITY IS 800 LBS.

SPREADER BEAM DURABLE BAKED IN POWDER COAT BLUE FINISH

MAGNET LIFTERS DURABLE BAKED IN POWDER COAT YELLOW FINISH

SPECIAL FEATURES

NONE

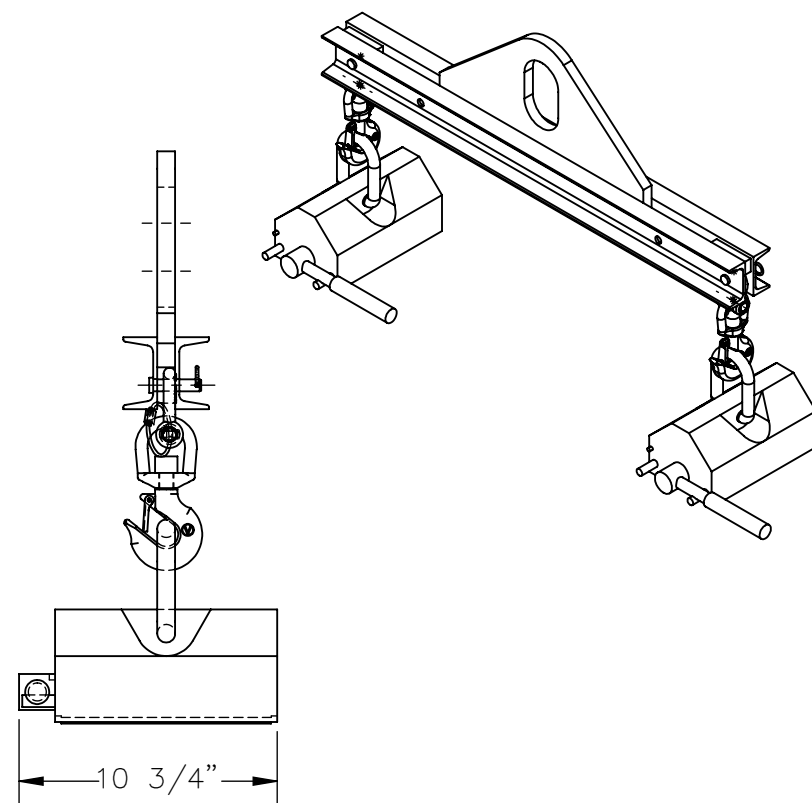

DIMENSION TOLERANCE $\pm 1/4"$

**A
P
P
R
O
V
A
L**

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

☐ As drawn ☐ As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

P.O.#	X
-------	---

W.O.#	X
-------	---

DRAWN BY: JGP

DATE:	03/30/2020
-------	------------

SALES:	X
--------	---

REFERENCE: X

SCALE: 1:8

FILE NAME:

QUOTED LEAD TIME: X

QUOTE #
X

08-007-451