

PRE MIUM TRUCK SCISSOR DOCK LIFT - WL-100-12-812, WL-RHT

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

STANDARD FEATURES

MODEL NUMBER: WL-100-12-812
UNIT TO BE MOUNTED: AT SURFACE
OR IN PIT (CIRCLE ONE)
CAPACITY (EVENLY DISTRIBUTED):
12,000 LBS
OVERALL PLATFORM SIZE:(96" X 144")
RAISED HEIGHT 72" ± 2"
LOWERED HEIGHT: 14"
REMOVABLE HANDRAILS AND
4"REMOVABLE TOE BOARDS 42" HT
W/ 21" MIDRAIL
USABLE WIDTH: 88 5/8"
TRUCK BRIDGE IS 72" W X 18" L AT
ROLLER END W/ CHAINS & HANDLES
FRAME SIZE IS: 86 1/2" W X 118" L
SHIPPING WT APPROX: 5100 LBS ±
6 1/2 HP POWER UNIT (SEE BOTTOM
LEFT CORNER)
W/ 8' OF HYDRAULIC HOSE
-HAND-HELD CONTROL ON A
4'-20' COIL CORD

REFER TO THE UNIT'S ELECTRICAL ** STANDARD UNIT NOT INTENDED FOR SIDE CROSS LOAD **

DIAGRAM FOR
ELECTRICAL SERVICE
REQUIREMENTS
-INSTALL TO MEET ALL APPLICABLE
STATE & LOCAL
CODES FOR YOUR AREA!

5" BEVELED TOE GUARD
ARCHITECTURAL REVIEW FOR
CORRECTNESS OF PIT
AND FOR COMPLIANCE TO
LOCAL AND STATE CODES IS
RECOMMENDED.

UNIT IS DURABLE LIQUID PAINT
BROWN FINISH
HANDRAILS ARE TOUGH BAKED IN
POWDER COATED YELLOW FINISH



DIMENSION TOLERANCE ± 1/4"

SPECIAL FEATURES

WL-RHT
REMOVABLE HANDRAILS
& TOEBOARDS

HOSE & CORD EXIT
FRAME THIS END

HYDRAULIC UNIT
OVERALL DIMENSIONS
14"W x 33"L x 31"H
(COMES W/ 8FT HOSE)

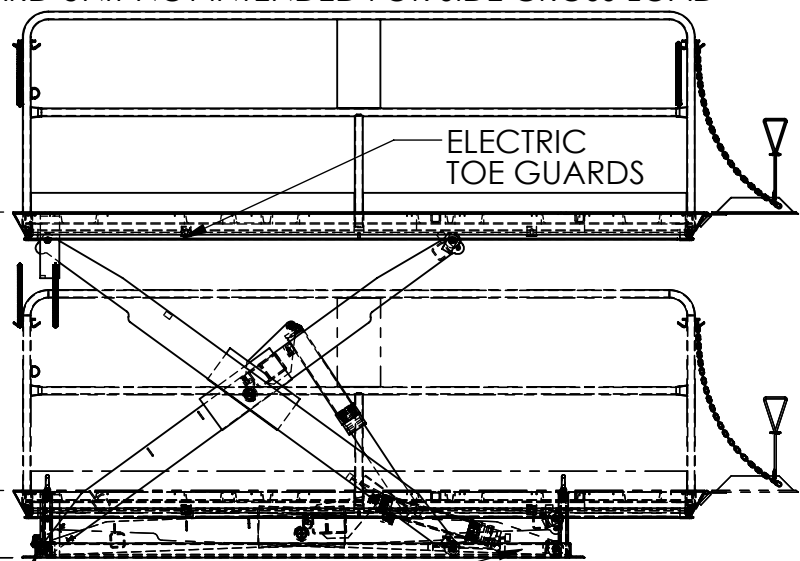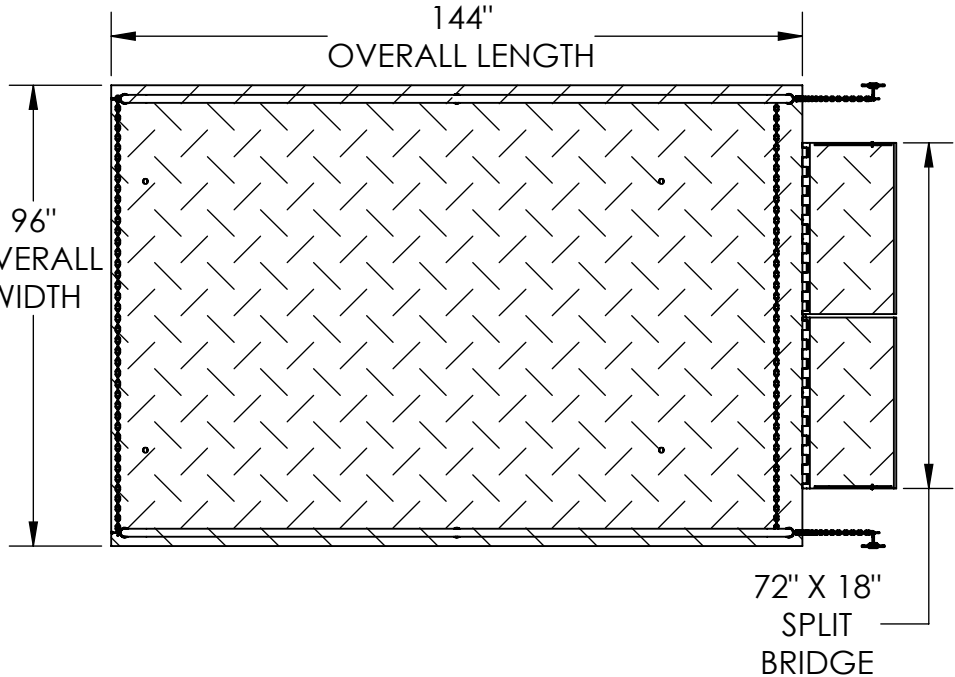

APPROVAL


I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE
[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

POWER	AC	DC (12V)	AIR/OIL
MOTOR VOLTAGE	115	208	230 460
DEDICATED CIRCUIT REQUIRED 60Hz			
MOTOR PHASE	SINGLE	THREE	
CONTROL	HAND	FOOT	



DISTRIBUTOR'S NAME:		P.O.#	
VESTIL MANUFACTURING		X	
W.O.#		X	
DRAWN BY: DLS		DATE: 2/27/2018	
REFERENCE: X		SALES: X	
QUOTED LEAD TIME: X		SCALE: 1:40	
QUOTE # X		FILE NAME:	
		05-007-340-001	