

PREMIUM TRUCK SCISSOR DOCK LIFT - WL-100-6-810, WL-RHT

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE
 ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON


STANDARD FEATURES

MODEL NUMBER:
 WL-100-6-810, WL-RHT
 UNIT TO BE MOUNTED: AT SURFACE
 OR IN PIT (CIRCLE ONE)
 CAPACITY (EVENLY DISTRIBUTED):
 6,000 LBS
 OVERALL PLATFORM SIZE:(96" X 120")
 RAISED HEIGHT 70" ± 2"
 LOWERED HEIGHT: 10"
 REMOVABLE HANDRAILS AND 4" TOE
 BOARDS 42" HT W/ 21" MID-RAIL
 USABLE WIDTH: 88 5/8"
 TRUCK BRIDGE IS 72" W X 18" L AT
 ROLLER END W/ CHAINS & HANDLES
 FRAME SIZE IS: 86 1/2" W X 117" L
 SHIPPING WT APPROX: 4200 LBS ±
 6 1/2 HP EXTERNAL POWER UNIT
 (SEE BOTTOM OF PAGE)
 W/ 8' OF HYDRAULIC HOSE
 -CONTROL IS HANDHELD, 2
 BUTTON, NEMA 4 PENDANT WITH
 4'-20' USABLE COIL CORD
 REFER TO THE UNIT'S ELECTRICAL
 DIAGRAM FOR
 ELECTRICAL SERVICE
 REQUIREMENTS
 -INSTALL TO MEET ALL APPLICABLE
 STATE & LOCAL
 CODES FOR YOUR AREA!
 5" BEVELED TOE GUARD
 ARCHITECTURAL REVIEW FOR
 CORRECTNESS OF PIT AND
 FOR COMPLIANCE TO LOCAL
 AND STATE CODES IS
 RECOMMENDED.
 UNIT IS DURABLE LIQUID PAINT
 BROWN FINISH
 HANDRAILS ARE TOUGH BAKED IN
 POWDER COATED YELLOW FINISH


DIMENSION TOLERANCE ± 1/4"

SPECIAL FEATURES

WL-RHT
 REMOVABLE HANDRAILS
 & TOEBOARDS

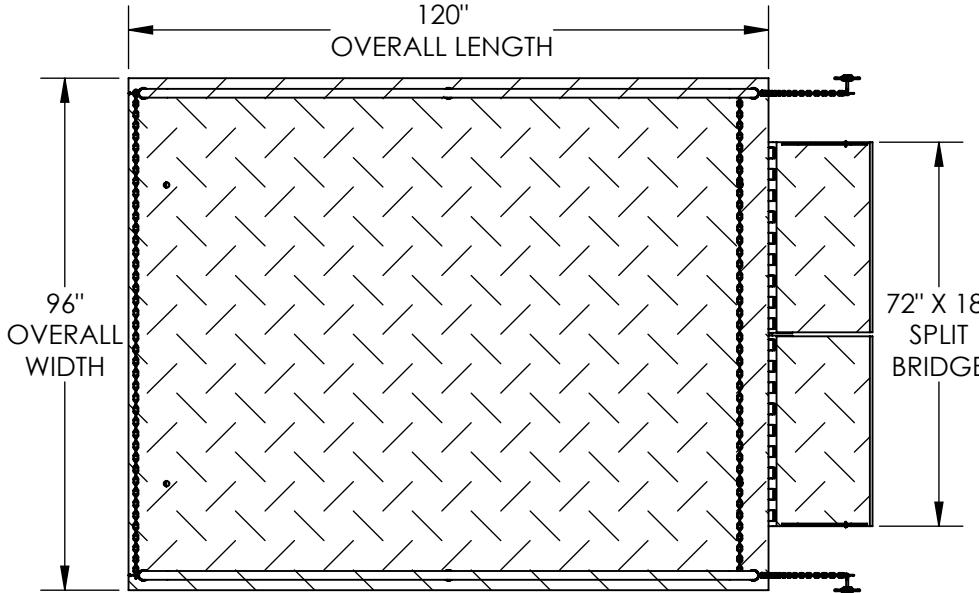

** STANDARD UNIT NOT INTENDED FOR SIDE CROSS LOAD **

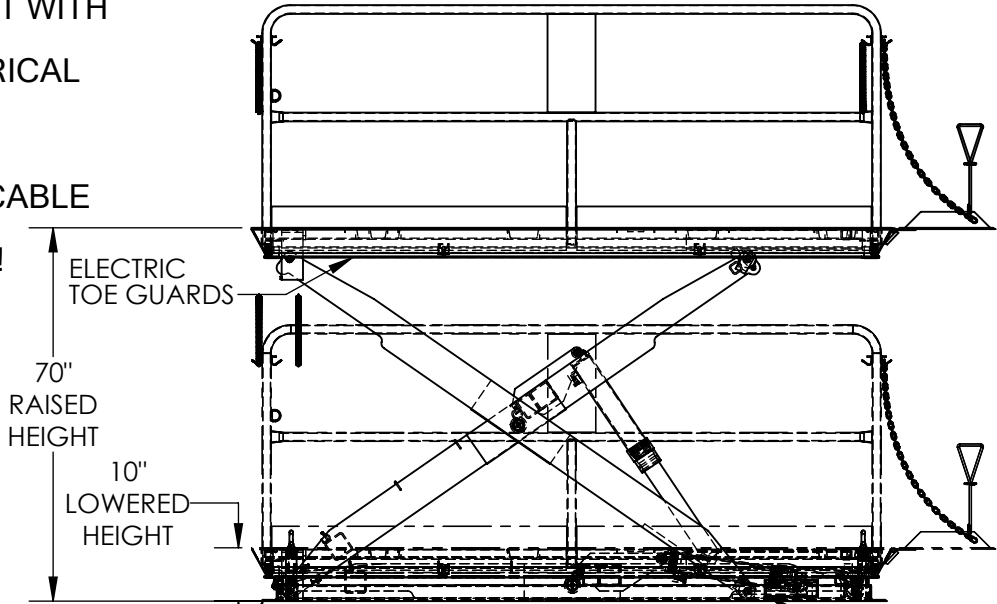

HOSE & CORD EXIT
 FRAME THIS END

HYDRAULIC UNIT
 OVERALL DIMENSIONS
 14"W x 33"L x 31"H
 (COMES W/ 8FT HOSE)

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
 REPRESENTED SATISFIES DESIGN AND DIMENSION
 REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
 CONFIRM PRODUCT AND INSTALLATION
 COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
 AND LOCAL REGULATIONS AND STANDARDS.
**UNITS REQUIRING APPROVAL DRAWINGS OR
 MODIFIED ARE NON-RETURNABLE**
☐ As drawn ☐ As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

POWER	AC	DC (12V)	AIR/OIL
MOTOR VOLTAGE	115	208	230 460
DEDICATED CIRCUIT REQUIRED 60Hz			
MOTOR PHASE	SINGLE	THREE	
CONTROL	HAND	FOOT	



DISTRIBUTOR'S NAME:		P.O.#	
VESTIL MANUFACTURING		X	
DRAWN BY: DLS		W.O.#	
DATE: 2/20/2017		X	
REFERENCE: X		SALES: X	
SCALE: 1:36		FILE NAME:	
QUOTED LEAD TIME: X		05-007-312-001	
QUOTE #		X	