
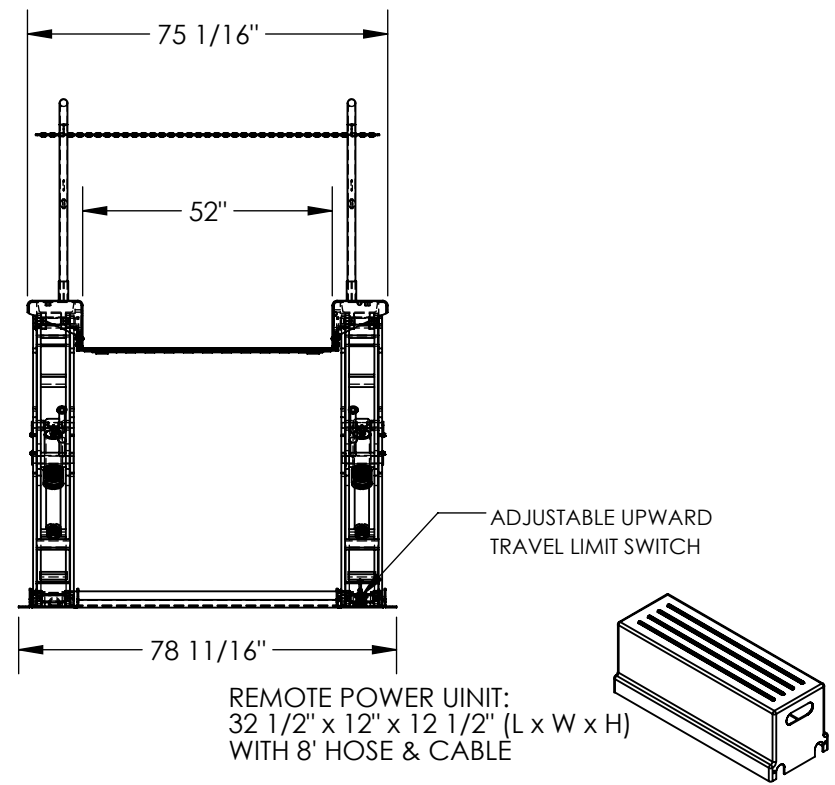


APPROX WEIGHT: 2645.72 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

GROUND LIFT SCISSOR TABLE - EHLTG-5284-3-54

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

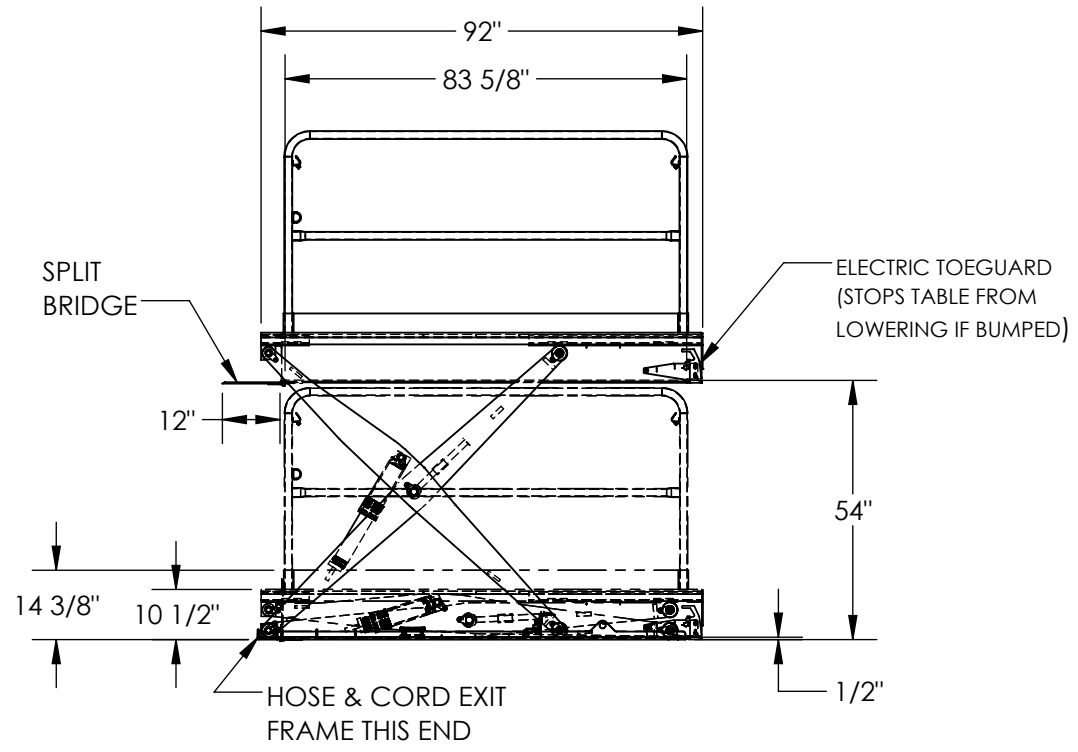

STANDARD FEATURES

- MODEL NUMBER IS EHLTG-5284-3-54
- PLATFORM USABLE LENGTH IS 83 5/8"
- PLATFORM USABLE WIDTH IS 52"
- PLATFORM RAISED MAX HEIGHT IS 54"
- PLATFORM LOWERED MIN HEIGHT IS 1 1/2"
- OVERALL LENGTH IS 92"
- OVERALL WIDTH IS 78 11/16"
- 12" WIDE X 52" LONG SPLIT BRIDGE
- NON-REMOVABLE TOE BOARDS
- TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 3,000 LBS
- REMOTE POWER UNIT
- FOOT CONTROL WITH 8 FT. STRAIGHT CORD
- SAFETY MAINTENANCE PROPS
- DISPLACEMENT STYLE CYLINDERS
- INSTALLED ROD DOWN
- EMERGENCY SAFETY STOP HYDRAULIC FUSE IN EACH CYLINDER
- UPPER TRAVEL LIMIT SWITCH
- ELECTRIC PINCH POINT GUARD
- UNITS HAVE 2' TEST LEAD AND PIG TAIL
- DURABLE LIQUID PAINT BLUE FINISH WITH DURABLE BAKED IN POWDER COATED YELLOW FINISH REMOVABLE HAND RAILS

DECK TOLERANCE $\pm 1/2"$
TABLE HEIGHT TOLERANCE $\pm 1/2"$
DECK FLATNESS $\pm 1/4"$

460V 3 PHASE AC POWER

CONTACT FACTORY FOR
OTHER POWER OPTIONS

SPECIAL FEATURES

NONE

APPROVAL	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.	
	UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE	
	[] As drawn [] As marked	
	Signed: _____ Date: _____	
Printed Name: _____		
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: JWW		W.O.#
DATE: 08/15/2019		X
REFERENCE: X	SCALE: 1:40	SALES: X
QUOTED LEAD TIME: ## WEEKS	QUOTE # N/A	FILE NAME: 04-007-114