

POWER LIFT JIB CRANE - WTJ-20-3-DC


APPROX WEIGHT: 245.83 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON


BOOM CAPACITY CHART WTJ-20-3

BOOM POSITION	BOOM EXTENSION		
	FULLY RETRACTED	MID-POSITION	FULLY EXTENDED
A	650 LBS	400 LBS	250 LBS
B	1000 LBS	770 LBS	600 LBS
C	1250 LBS	950 LBS	780 LBS
D	2000 LBS	1500 LBS	1200 LBS

SPECIAL FOUNDATION MAY BE REQUIRED, SEE OWNERS MANUAL FOR DETAILS. UNIT IS DESIGNED FOR VERTICAL LIFTING ONLY. DO NOT USE FOR LIFTING PERSONNEL OR FOR OVERHEAD LIFTING.

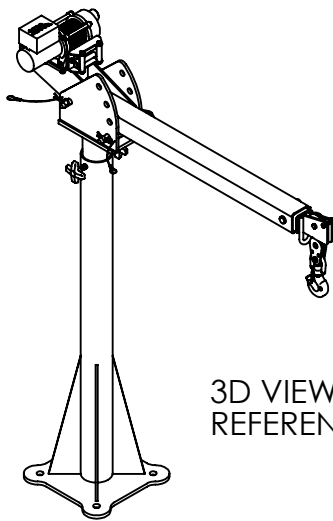

3D VIEW SHOWN FOR REFERENCE ONLY

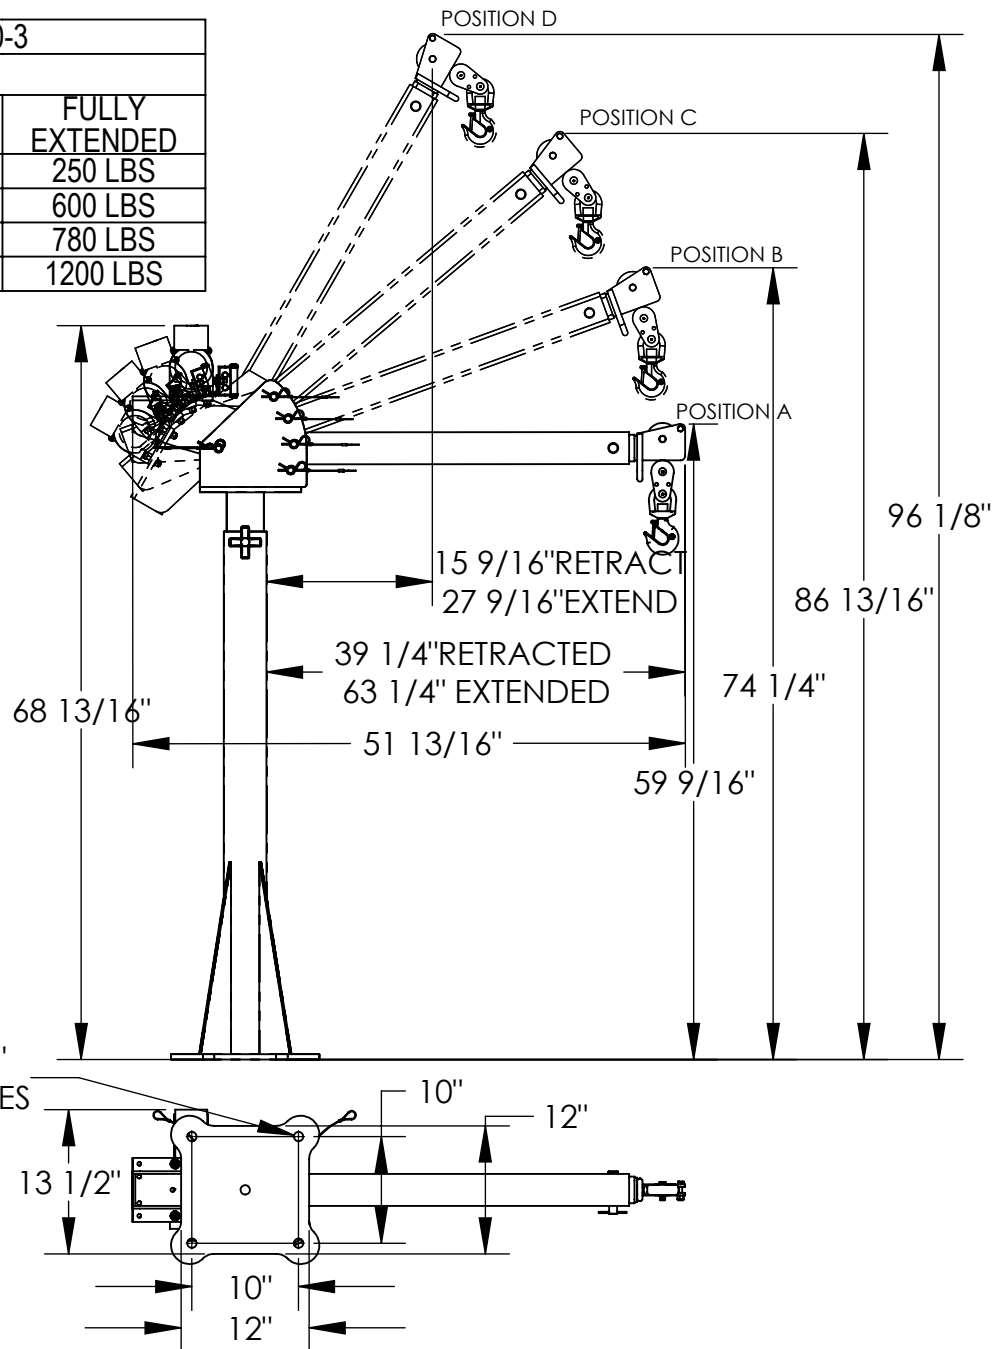

DIMENSION TOLERANCE $\pm 1/4"$

STANDARD FEATURES

MODEL NUMBER IS: WTJ-20-3-DC
CAPACITY IS: 2,000 LBS.
OVERALL WIDTH IS: 13 1/2"
OVERALL RETRACT LENGTH IS: 51 13/16"
USABLE RETRACTED LENGTH IS: 39 1/4"
USABLE EXTENDED LENGTH IS: 63 1/4"
OVERALL HEIGHT IS: 68 13/16"
OVERALL STORAGE HEIGHT IS: 70"
12V DC POWERED WINCH
WITH HAND PENDANT CONTROL
Ø3/16" X 46' LG CABLE WITH HOOK
DURABLE LIQUID PAINT BLUE FINISH

STANDARD FEATURES

NONE

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DATE: 5/1/08		W.O.#
X		X
DRAWN BY: ND	SCALE: 1:18	SALES: X
REFERENCE: X	FILE NAME:	
QUOTED LEAD TIME: X	QUOTE # X	28-007-111